

TOUCHWOOD PRODUCTS

Spiral Sash Balance Installation

(type 'F', 'K' and 'M' balances)

Read instructions fully before installing balances.

It is recommended that before balances are installed the sashes are glazed and in the case of timber windows all painting is completed ensuring that both sashes slide freely in the frame.

While sketches show timber windows throughout, fitting instructions apply to all types.

Preparation of Windows

Grooving details

Provision must be made to house each balance in a groove or channel which can be either in the frame jamb (Fig 1), or in the sash stile (Fig 2) and must be of minimum dimensions shown on table below. The groove must run the full length of the sash run.

Groove Dimensions

Balance Type	D	F	K	M
Dimension X (mm)	16	17	21.5	26
Dimension Y (mm)	17	17	21.5	27




Fig 1




Fig 2

Bottoms of sashes should be prepared to suit balance foot attachment to be used. Cut-outs to be of sufficient depth to receive attachments and screw heads.

Fig 3 Bottom rail preparation for standard 'F' balance foot.




Fig 4 Stile preparation for channel fitting for standard 'F' balance foot. (Fix channel prior to fitting sash into frame)




Fig 5 Bottom rail preparation for standard 'K' and 'M' balance foot. (grooved stile shown)


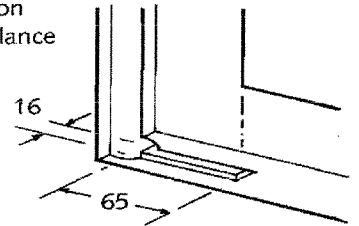


Fig 6 Grooved stile preparation for channel fitting for standard 'K' and 'M' balance foot. (Fix channel prior to fitting sash into frame)

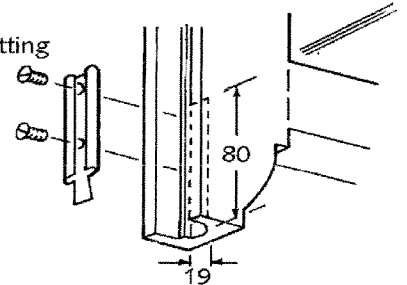

Checking balances

2 It is important that the balances used are suitable for the weight of the sash. 'F', 'K' and 'M' balances are purpose made to suit the weight of sash for which they are ordered. The relevant weight in lbs is stamped on the sash attachment at the bottom of each balance. Check that the finished sash weight is within 1lb (0.5kg) of the figure (See figure 7)

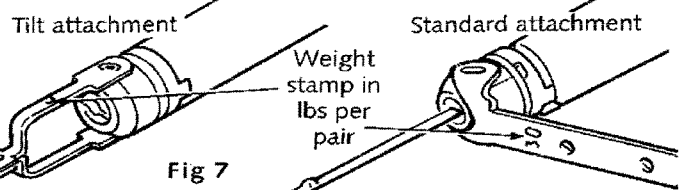


Fig 7

'F' balances are purpose made to suit sash weights from 6.8 Kg (15 lbs) to 24.9 Kg (55 lbs) and have a 15mm (5/8") tube diameter.

'K' balances are purpose made to suit sash weights from 9.0 Kg (20 lbs) to 37.6 Kg (83 lbs) and have a 19mm (3/4") tube diameter.

'M' balances are purpose made to suit sash weights from 6.8 Kg (15 lbs) to 45.4 Kg (100 lbs) and have a 22.5mm (7/8") tube diameter

P O Box 3655

Herts CM22 7WH

Tel: 01279 505931/Fax: 01279 503832

Email: info@sashwindows.info

Installing balances

- 3** Note that the shorter pair of balances is normally for the top sash, given sashes of equal height. With the sashes lowered, insert the appropriate pair of balances into the grooves (Fig 8). In the case of unequal size sashes it is possible to slightly bow the balance for insertion into the groove of the larger sash. In some cases, larger sashes may have to be removed.




Fig. 8

Fit the top of the balances to the frame jamb at the centre of the groove tight up against the frame head, with the flat of the foot attachment against the jamb. Fix using woodscrews provided (Fig.9).

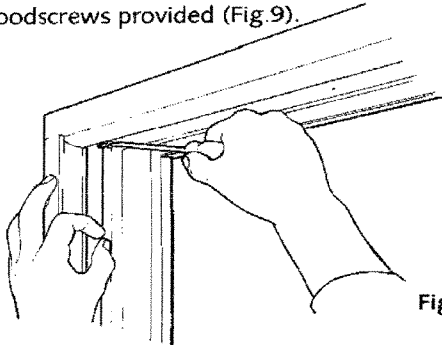


Fig. 9

To attach balances to sashes, firstly raise the sashes as high as possible and prop in position. The foot attachment at the bottom of each balance should now be visible. Using pliers or vice grips, pull the foot attachment straight down, sufficient to clear the spiral rod protruding from the lower end of the balance. (Fig 10).

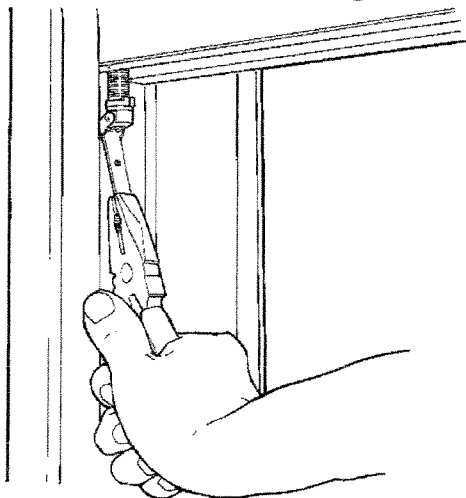


Fig. 10

Now fold the foot attachment under the bottom rail of the sash and carefully release the tension in the balance. (Fig. 11).

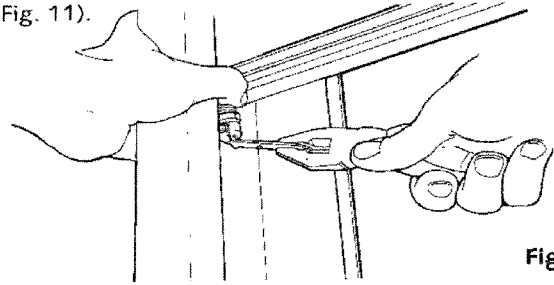


Fig. 11

Using the woodscrews provided, fix the foot attachment to the underside of the bottom rail, ensuring that the balance is kept tight to the sash. (Fig. 12).

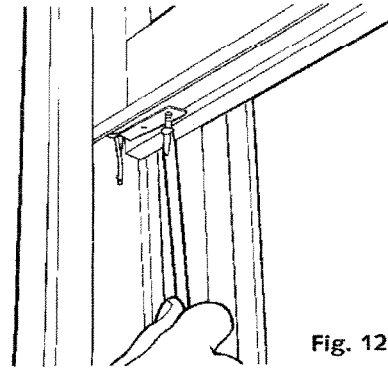


Fig. 12

Alternative method

For unequal sashes, very heavy sashes and/or sashes with horns.

Before inserting balances into grooves, tie a loop of strong cord or wire around the foot attachment as shown (Fig 13).

Fig. 13



For standard bottom rail fixing.

Fig. 14



For fixing to horns using channel fittings. Firstly extend the foot attachment past the spiral rod and then fold over as shown. Proceed as previously described, using this loop to pull the foot attachment downwards and across under the bottom rail of the sash. Fix using woodscrews provided before fully tightening screws, remove the cord or wire from the foot.


For sashes with horns, using standard horn channel attachments (pre-fixed in Section 1, Fig 4 and Fig 5) use the loop to pull the balance foot down so that it can be located into the bottom of the channel and then carefully released. (Fig 14.) Remove the loop of cord or wire.

Fix travel stops

- 4 Fix travel stops provided, the shorter one at the top of the bottom sash run, see Fig. 15.

In the case of non-standard applications special stops may be required. In such cases suitable longer timber stops should be substituted for the standard metal type supplied. These should be long enough to prevent the balance from being extended by more than twice its tube length.


IMPORTANT: FAILURE TO FIT TRAVEL STOPS MAY RESULT IN BALANCE FAILURE.

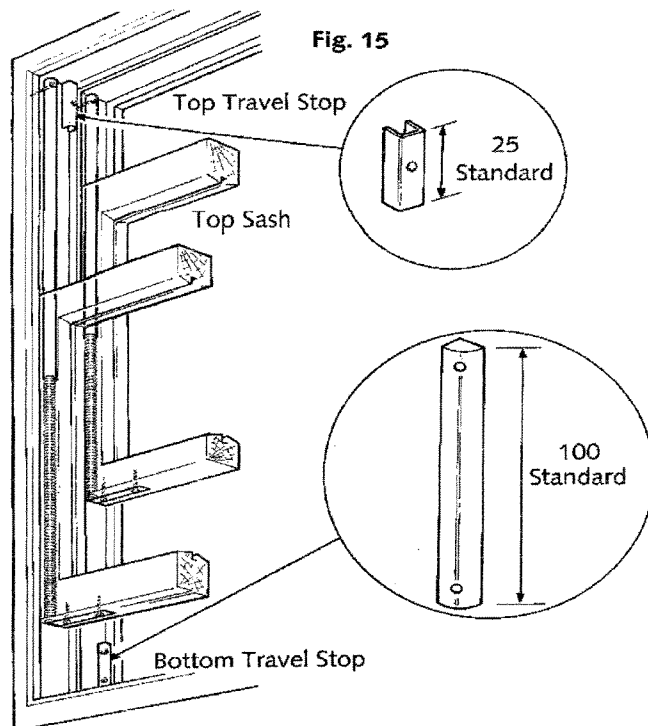

Balancing sashes adjusting balances

- 5 Try the sashes up and down TO THE LIMIT OF THEIR TRAVEL. If there is a tendency for either sash to drop when in the up position, adjust the balances as follows: Lower the sash 50mm (2") or 75mm (3") until the bottom of the balance is below the spiral rod. A screwdriver can now be inserted in the slot in the ratchet fitting at the bottom of the balance (see fig 16). Adjust by turning the ratchet in an anti-clockwise direction as viewed from underside (see fig 16). Two 'clicks' of the ratchet equal one complete turn. Refer to adjustment chart overleaf for the number of turns to be added. Ensure that the same number of turns are applied to each balance pair. Do not over tension.

Fig. 16

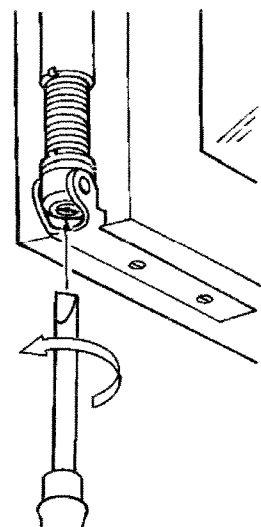

Maintenance

Depending upon location and frequency of use, lubrication of the internal mechanism of the balance may be desirable after a length of time, the period of which will vary according to site circumstances. A few drops of light oil or spray such as WD40 applied via the top end of the balance tube will always improve the operating action of a balance after long service.

Important

- Don't** bend the spiral rod.
Should the end of the spiral rod be accidentally bent, straighten with pliers before attempting to install.
- Don't** fold foot attachment over until balances have been fixed in place (except for sashes with horns) as this gives some protection to the spiral rod.
- Don't** use balances on sashes beyond their respective weight.
- Don't** tension balances more than necessary.
- Don't** tension balances before glazing.
- Do** keep the foot attachment tight into the sash and make sure that the covers of the fitting do not rub the jamb when the sash is moved.
- Do** fit correct travel stops.